


PL-2509 Test Report

1、Purpose : PL2509 VS INNOX

2、Test Item : Adhesion performance before and after high temperature baking

3、Testing method: The sample is pasted with SUS304 mirror steel plate and baked at 180°Cx20min

4、Test Results

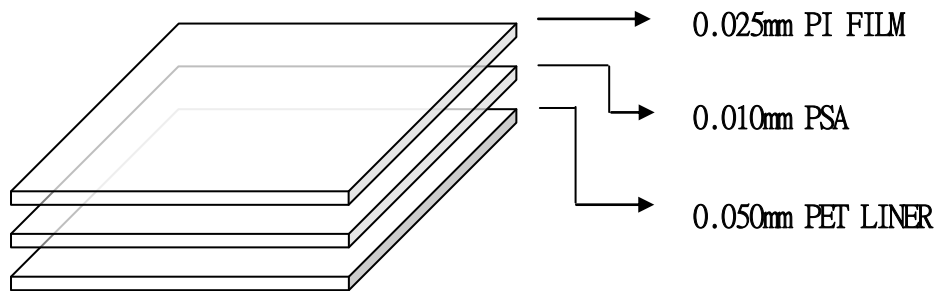

Item	Content	Unit	PL2509	INNOX
Exterior	(TDcurl)	mm	≤3mm	≤3mm
Structure	PI Film	um	25	25
	Silicon thickness	um	10	10
Adhesion	25°C	g/50mm	152	160
	175°C*3min	g/50mm	184	174
	175°C*8H	g/50mm	274	800
	Peeling	g/50mm	6	5
Other	out gasing	%	0.8	0.6